


Sales price £479.95

Sales price without tax £399.96

Tax amount £79.99

A Dualband 50/70MHz Yagi with single feedpoint



Description

Postage please [This email address is being protected from spambots. You need JavaScript enabled to view it.](#)

An Excellent Dual Band Yagi for 50/70MHz with 8.0m boom

The 4-6-16 Dual Band Yagi has a total of 16 elements, 8 elements are used on 70MHz while 8 elements are used on 50MHz. The 4-6-16 InnovAntennas Dual Band Yagi stands aside from the crowd due to the methods used for its design. The 4-6-16 uses no traps or coils, no phasing arrangements and has no need for 'compromise' spacing between elements as the antenna has a set of correctly spaced elements for either band but still deploys only one feed point. An excellent antenna with great SWR bandwidth and performance in one package.

Performance

Gain on 50MHz: 12.30dBi @ 50.150MHz

F/B on 50MHz: 18.48dB @ 50.150MHz

Gain on 50MHz at 10m above Ground: 17.69dBi

Gain on 70MHz: 12.21dBi @ 70.200MHz

F/B on 70MHz: 19.04dB @ 70.200MHz

Gain on 70MHz at 10m above Ground: 17.83dBi

Power Rating: 3kw

SWR 50MHz: Below 1.2:1 from 50.00MHz to 50.500MHz

SWR 70MHz: Below 1.3:1 from 69.900MHz to 70.500MHz

Boom Length: 8.05m

Weight: 9.35Kg / 20.6LB

Turning Radius: 3.991m / 13.09ft

Wind Loading: 0.29 Square Metres / 3.13 Square feet

Wind Survival: 169KPH / 105MPH

Other options available if higher wind loading/survival is required.


Specification

This antenna is made with 1/2 inch (12.7mm) centre elements and 3/8 inch (9.525mm) outer elements (70MHz element are one piece 1/2 inch). The antenna has fully insulated elements which will ensure continuous, high performance for many years to come. Boom to mast brackets are included with all antennas which will support 2 inch (50mm) masts. **Boom is 1.5 inch square 16SWG aluminum** and a **Kevlar boom guy** is supplied with **stainless steel** turnbuckles for final guy adjustment.


Our antennas are constructed with the best quality materials in order that the best mechanical construction can be achieved, not the cheapest and most profitable! Even a digital caliper is used (with an accuracy of .01mm) to measure the elements during production to ensure they are within 0.2mm of what they should be, ensuring they work as well as our software model predicts.

Note: Much development time has gone into our antennas, not just on basic electromagnetic design, we are able to model the effect of insulators, booms and other objects to ensure the make up of our antennas have least effect on performance and pattern degradation. More information can be found [here](#)


- Marine grade Stainless Steel Fittings
- Original Stauff Insulation clamps
- Mill finished boom and elements for highest levels of accuracy

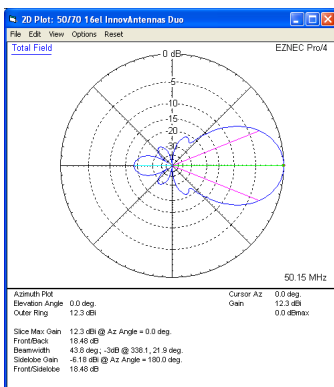


Azimuth Plot 50MHz

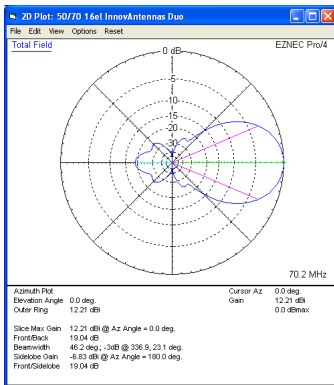


Azimuth Plot 70MHz

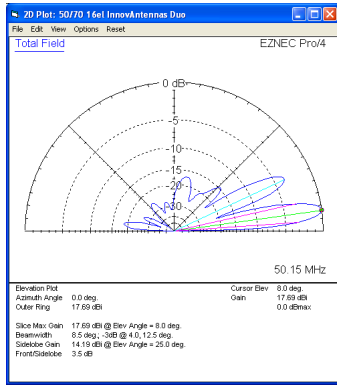


Elevation Plot 50MHz (10m above ground)

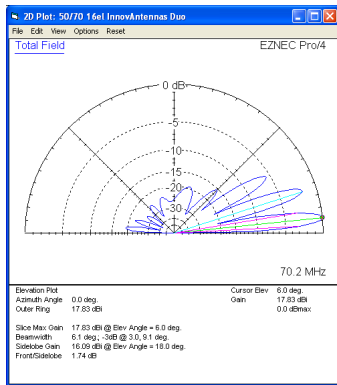


Elevation Plot 70MHz (10m above ground)

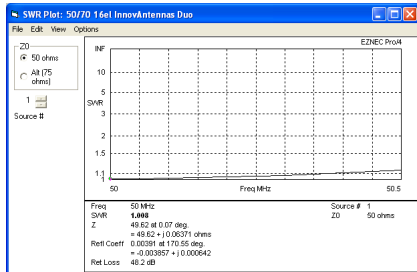

SWR 50MHz

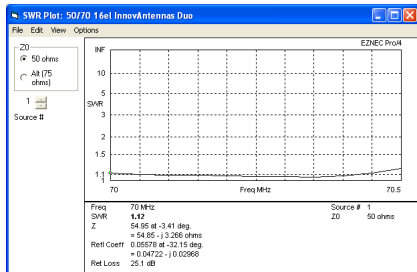

SWR 70MHz

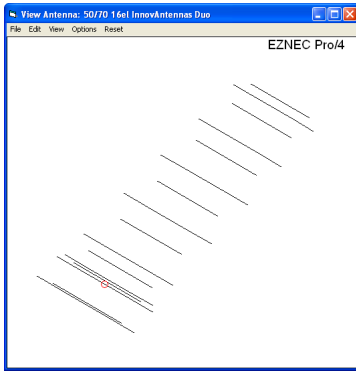

The 4-6-16 element layout



Installed at LA9BM and his comments below:

'Hi Justin

My 8+8 el for 6 and 4 meter is up for 2 weeks ago. Had to use a lift. The antenna is on a 15 meter telescopic tower. Super SWR and working great.

Like to send you some pictures. Use them in your advertisements if you like. I will be happy. Also you will see the Ferrite Choke coupling as well as a picture of my QTH.

73s and hope to work you

Leif – LA9BM

JP40cn'

Manufactured the right way, not the cheapest way!

//