


50MHz Yagis (all): 7 element 50MHz OP-DES Yagi (7.4m)

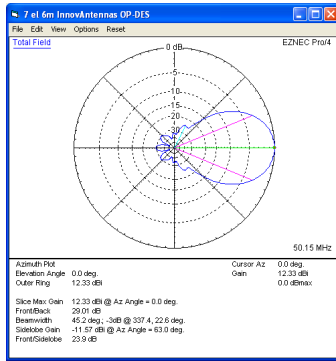

Sales price £349.95

Sales price without tax £291.63

Tax amount £58.33

A Wideband 50MHz OP-DES Yagi

Description



For exact shipping prices please This email address is being protected from spambots. You need JavaScript enabled to view it. your full postal address and product you are interested in to This email address is being protected from spambots. You need JavaScript enabled to view it.

A 7 element wideband 49.9-50.5MHz OP-DES (Opposing Phase Driven Element System) Yagi - Second Generation OP-DES Yagi !

The OP-DES is the newest in patent technology produced by InnovAntennas and is specifically designed for maximum performance, wide-band applications. Read more about the [OP-DES Yagi Here](#). InnovAntennas use the latest in [Electromagnetic Design Technology](#) to ensure the very best results and the OP-DES Yagi is proof of that!

This antenna has a flat SWR curve covering 49.9-50.5MHz at 1.1:1 SWR. The super-compact 7el has incredible rearward suppression and a huge punch too, Take a look!

Performance

Gain: 12.33dBi @ 50.150MHz

F/B: 29.01dB @ 50.150MHz

Peak Gain: 12.42dBi

Gain at 10m above Ground: 17.75dBi

Peak F/B: 30.19dB

Power Rating: 5kw

SWR: Below 1.1:1 from 49.90MHz to 50.50MHz

Stacking Distance: 5.5-6.4m (5.9m recommended)

2 Stacked Gain @ 5.9m spacing: 15.11dBi

2 Stacked F/B: 30.25dB

2 Stacked Gain @ 5.9m Spacing 10m above ground: 20.21dBi

Boom Length: 7.440m

Weight: 7.67Kg / 16.9LB

Turning Radius: 3.987m / 13.1ft

Wind Loading: 0.28 Square Metres / 3.06 Square feet

Wind Survival: 187KPH / 116MPH - **A 125MPH+ (HD) version available upon request**

Other options available if higher wind loading/survival is required.

Specification


This antenna is made with 1/2 inch (12.7mm) centre elements and 3/8 inch (9.525mm) outer elements with the OP-DES end sections 3/8 inch (9.525mm). The antenna has fully insulated elements which will ensure continuous, high performance for many years to come. Boom to mast brackets are included with all antennas which will support 2 inch (50mm) masts. Boom is 1.5 inch (38.1mm) square 16SWG aluminum.

OTHER TAPER SCHEDULES ARE AVAILABLE FOR THIS ANTENNA, CALL OR EMAIL FOR DETAILS


Our antennas are constructed with the best quality materials in order that the best mechanical construction can be achieved, not the cheapest and most profitable! Even a digital caliper is used (with an accuracy of .01mm) to measure the elements during production to ensure they are within 0.2mm of what they should be, ensuring they work as well as our software model predicts.

Note: Much development time has gone into our antennas, not just on basic electromagnetic design, we are able to model the effect of insulators, booms and other objects to ensure the make up of our antennas have least effect on performance and pattern degradation. More information can be found [here](#)

- Marine grade Stainless Steel Fittings
- Original Stauff Insulation clamps
- Mill finished boom and elements for highest levels of accuracy
- Guy support hardware is supplied with this antenna

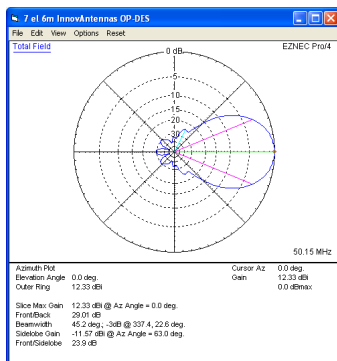


Azimuth Plot

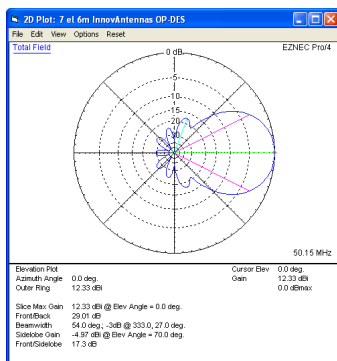


Elevation Plot


50MHz Yagis (all): 7 element OP-DES Yagi (7.4m)

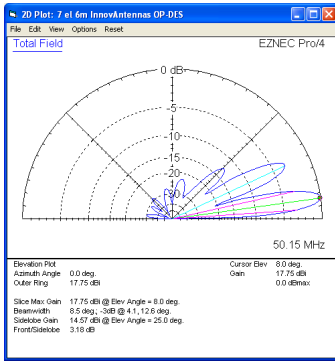

Single 7 element OP-DES up 10m above ground

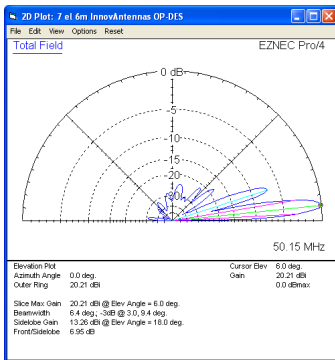

2 x 7el OP-DES Yagi 5.9m apart with the bottom antenna 10m above ground

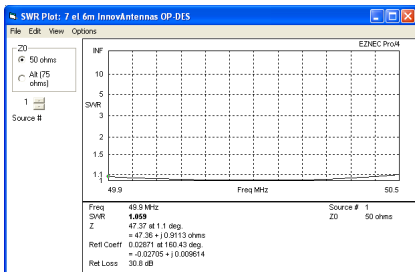

SWR



How the OP-DES looks; A 6el 10m OP-DES

Manufactured the right way, not the cheapest way!

//