



Sales price £219.95

Sales price without tax £183.29
Tax amount £36.66

A 8 element OWL EME Yagi Super-Light 144MHz Yagi

Description

A 8 element OWL-G/T (Optimised Wideband Low Impedance) Super-Light Yagi for 144-145MHz

THE low noise Yaig for city locations

FOR HORIZONTAL MOUNTING - Now with more gain!

The G0KSC OWL-G/T is another fantastic design by G0KSC. Every ham knows a low impedance Yagi provides excellent performance. However, traditionally, low impedance has meant narrow band. G0KSC developed the OWL to have very close element spacing, this has increased the stability of the OWL over traditional low impedance Yagis. Additionally, the G0KSC OWL has been optimised for a 12.5 Ohm feed point impedance (with traditional split dipole). With the split dipole swapped for a folded dipole, impedance is now a cool 50 Ohm so again (and as with all InnovAntennas Yagis) no matching device is needed!

IDEAL PORTABLE OR SOTA USE! - Super light weight structure ensures minimal wind load and weight with top-end, low noise performance!

Designed with the very latest modelling software packages costing 10's of thousands of pounds, not 30 year old software costing around \$100.00 !! **Accuracy** in model and real-world performance assured.

Our antennas are constructed with the best quality materials in order that the best mechanical construction can be achieved, not the cheapest and most profitable! Even a digital caliper is used (with an accuracy of .01mm) to measure the elements during production to ensure they are within 0.2mm of what they should be, ensuring they work as well as our software model predicts.

Ian G0CNN made this excellent video which highlights how simple the OWL is to construct:



2 x 8el OWL G/T at G3YDD

The super-light OWLs have elements connected and through the boom with a single securing bolt (3el 70Mhz rear mount OWL featured above)

Product Highlights

- Marine grade Stainless Steel Fittings
- Optimised boom and elements for highest levels of accuracy
- Optimised by computer for best possible performance
- No matching device means no matching loss!
- Easy and fast fit, assemble in just a few minutes

For more information This email address is being protected from spambots. You need JavaScript enabled to view it.

Performance

Gain: 13.87dBi @ 144.1MHz

F/B: 27.71dB @ 144.1MHz

Peak Gain: 14.2dBi

Gain 10m above ground: 19.7dBi

Peak F/B: 26.02dB

Power Rating: 5kw

SWR: Below 1.2:1 from 144MHz to 145MHz

Boom Length: 4.15m

Weight: 2.2kg/4.7lbs (Under-boom for extra strength available at extra cost)

Safe Wind Speed: 135Kph/80Mph

Turning Radius: 1.95m/6.43ft


Vertical Stacking: 2.85M

Specification

This antenna is made with a 1/2 inch (12.7mm) and 3/8 inch (9.525mm) diameter tube OWL loop and 3/8 inch (9.525mm) elements with a wall thickness of 1.6mm. high performance for many years to come. Boom is 3/4 inch. **This antenna is not made cheaply, it is made to perform and to do so for many years.**

No figures are made up here as they are in some Ham Radio adverts, all performance figures are verified in the very latest software simulation packages with some antennas being professionally confirmed on an antenna range.

Azimuth Plot

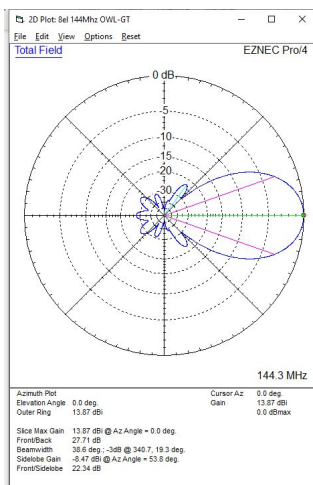

Manufactured the right way, not the cheapest way!

* Where possible marine grade stainless steel components are used.

//